


SANIMARIN-RV
720 01.20

SFA SANIFLO

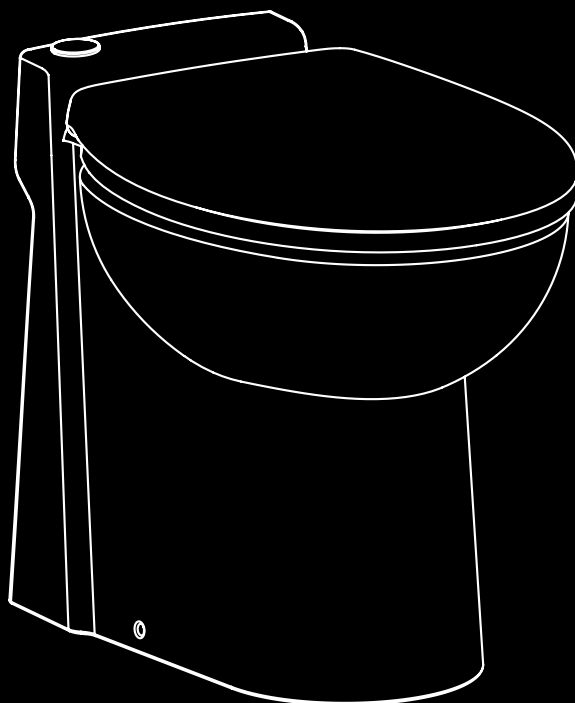

SN4









IMPORTANT

DO NOT RETURN ANY MERCHANDISE TO THE VENDOR





For customer Service, Returns or Technical Questions, please call Saniflo's Technical support toll-free at 800-571-8191 (USA) or 800-363-5874 (CDN).

This product must be installed in strict accordance with local plumbing codes.
Product should be installed by a licensed plumber.





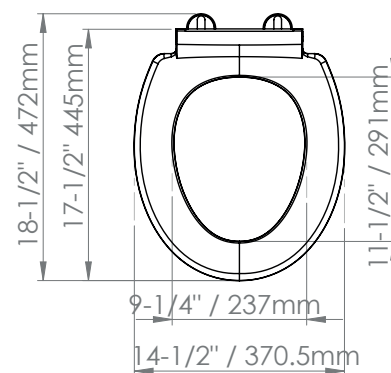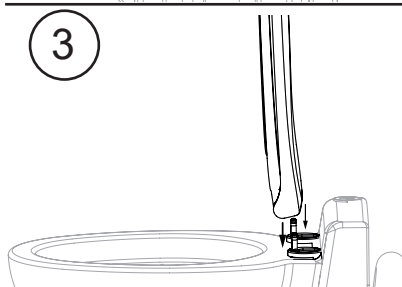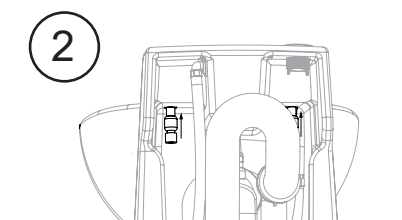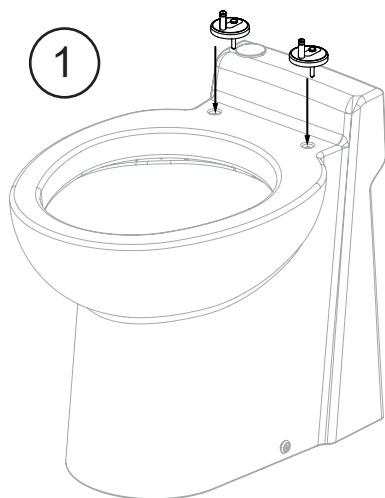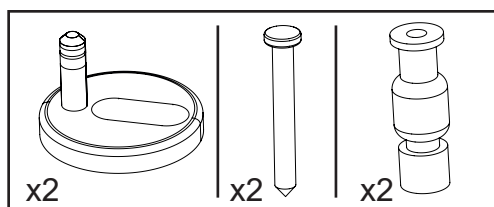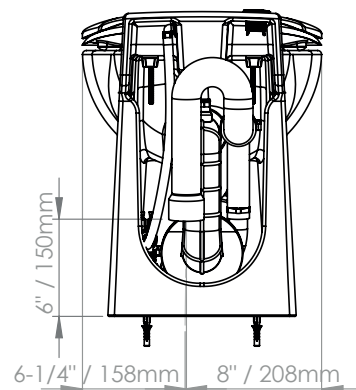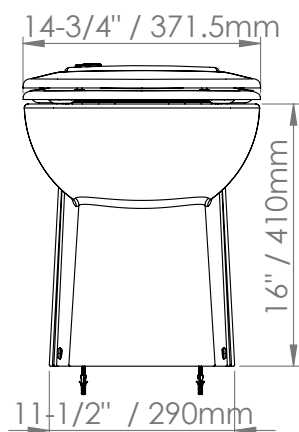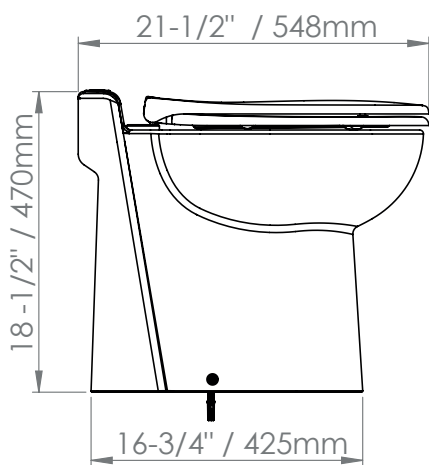



PANEL









CONTROL BOX




SENSOR (NOT INCLUDED)

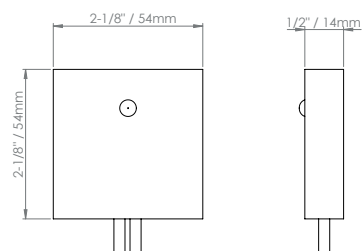

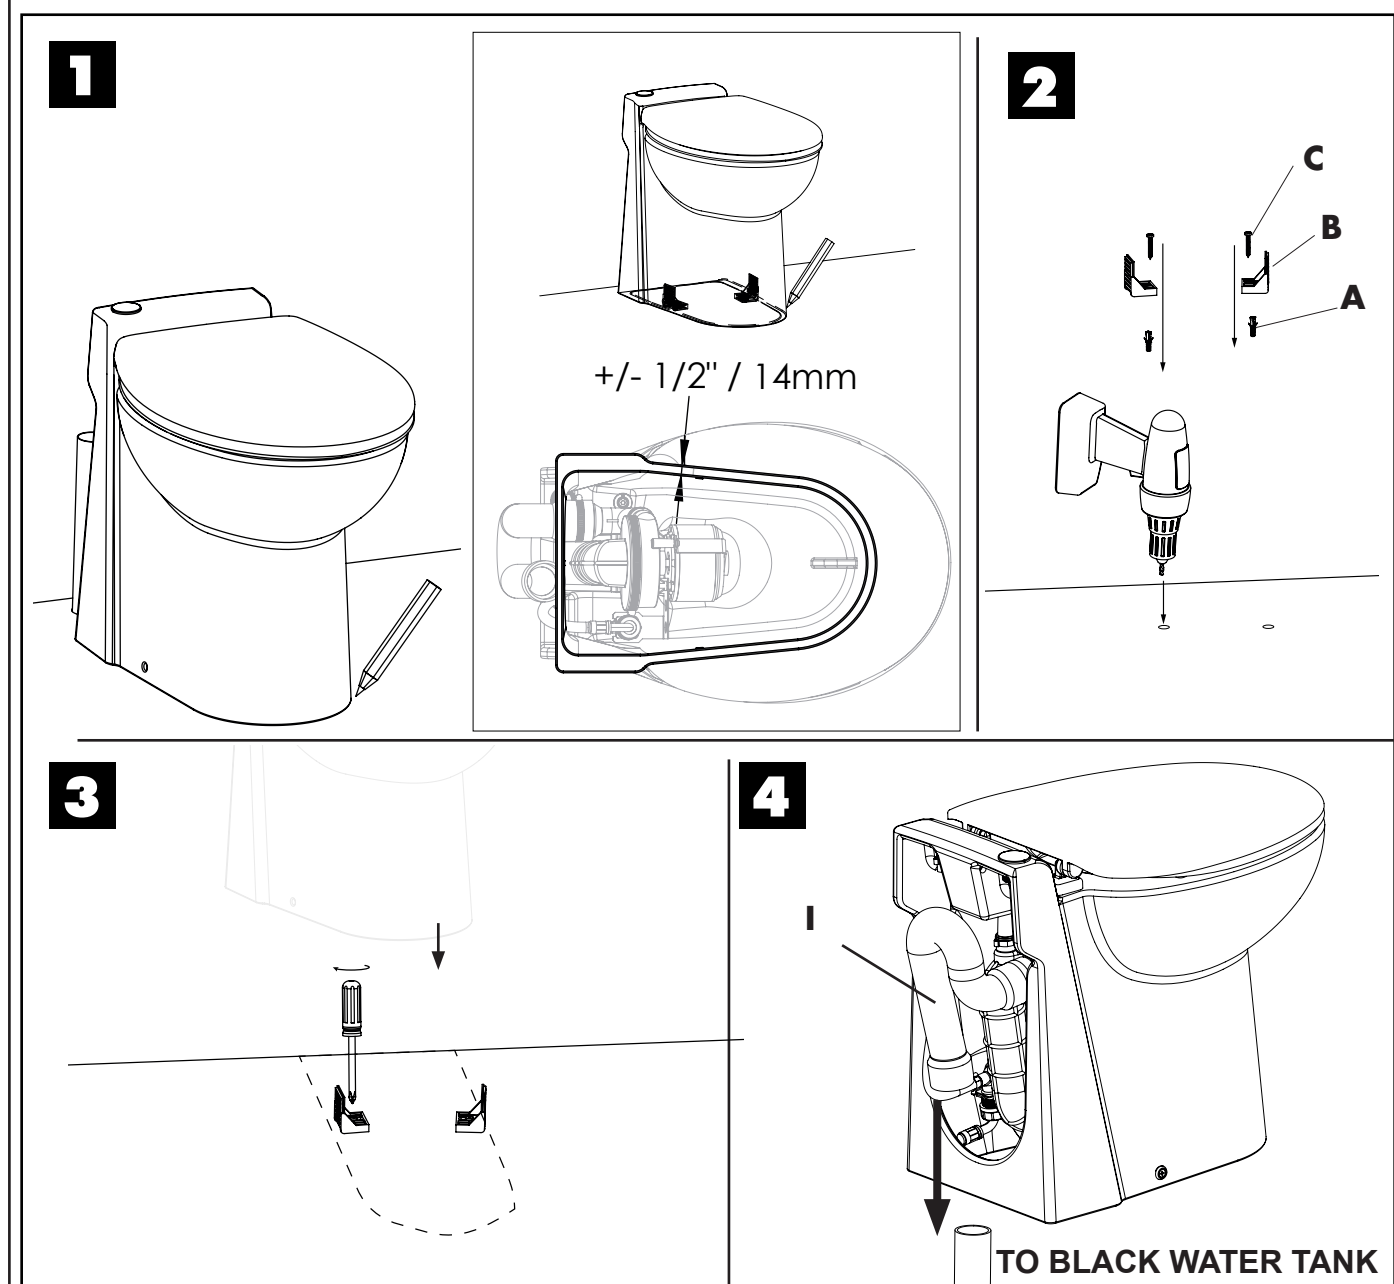
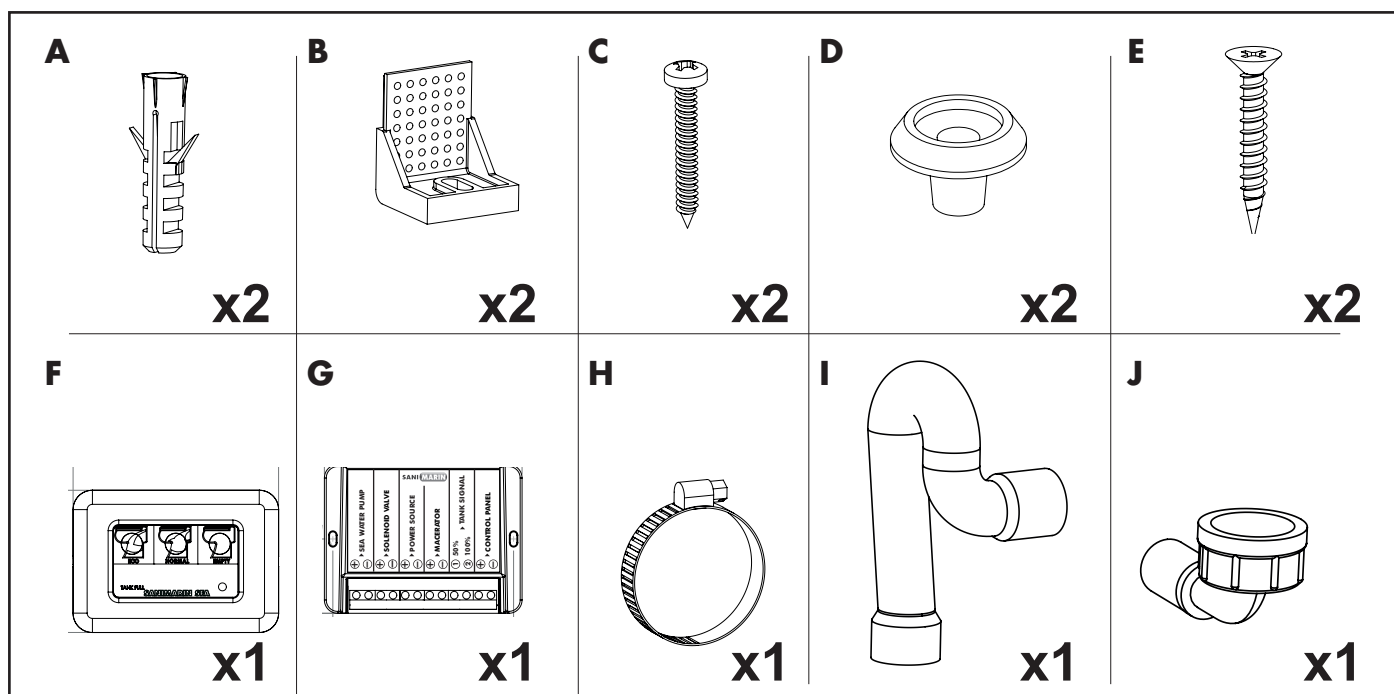


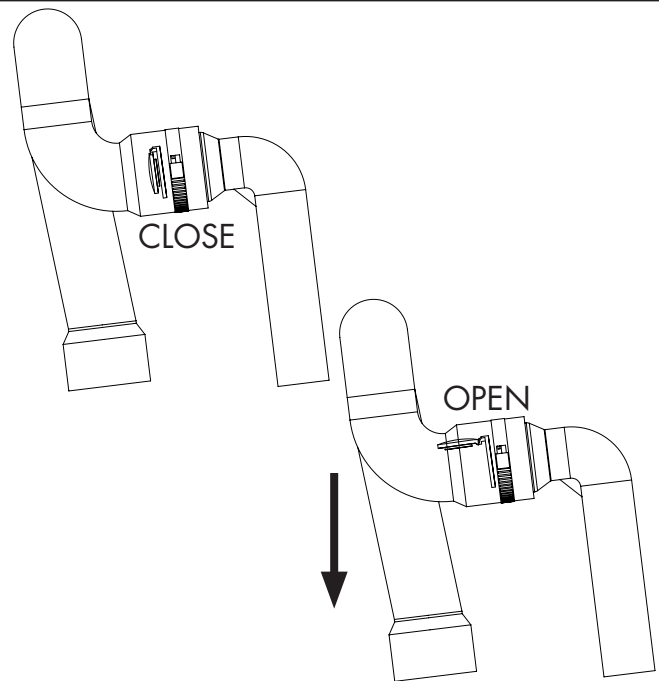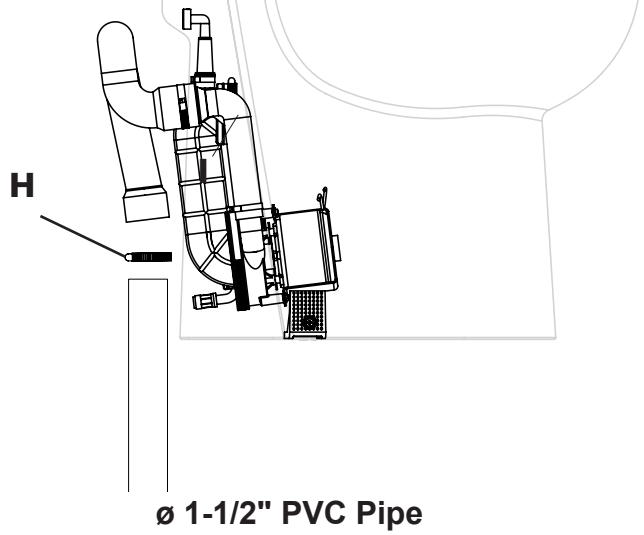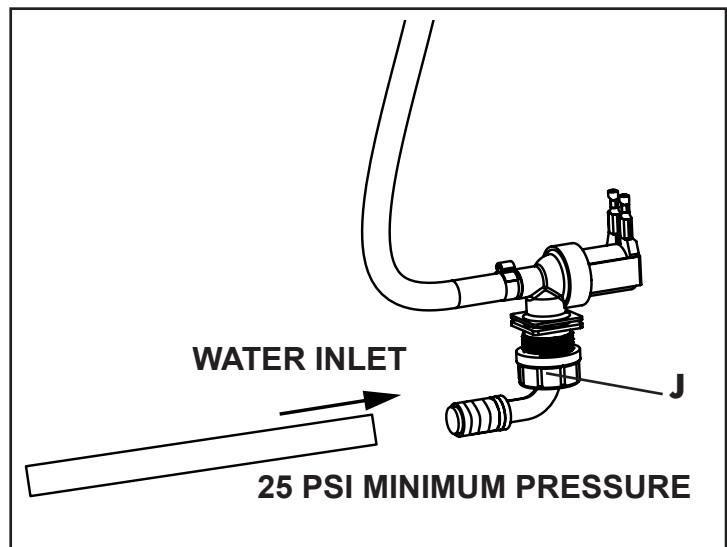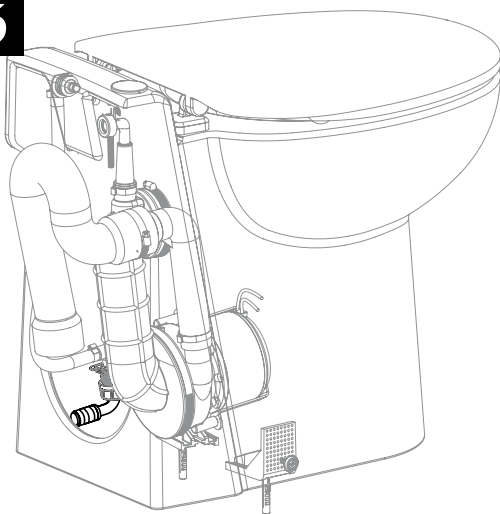5**6****7**

8

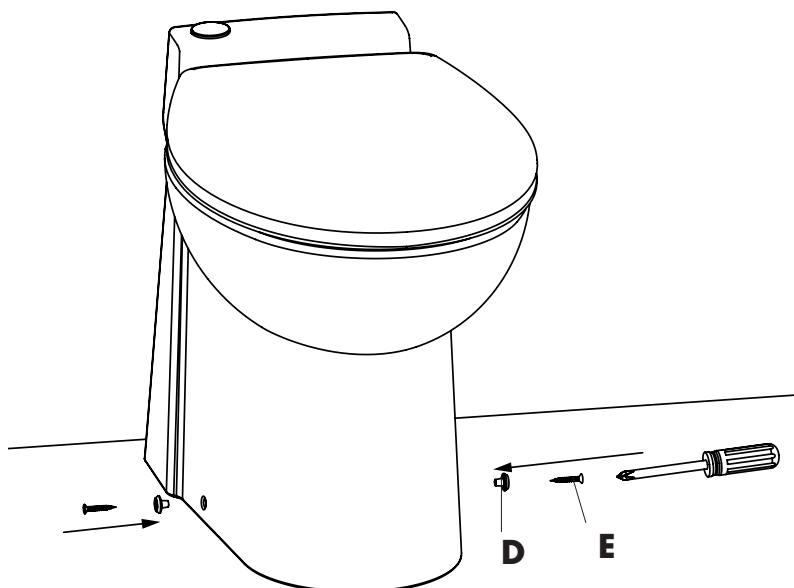

SENSOR POSITIONING



Information on Sensors:


Sensors are provided with 14" cables

If need to extend cable, no specific wire is required.


You can extend up to 15 Ft.

9

MINIMUM
Wall thickness
+ 50% thickness

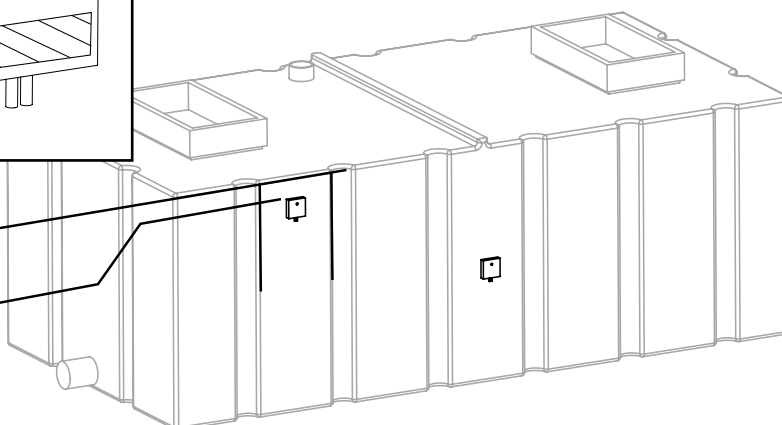


Clearance should be no less than 2"

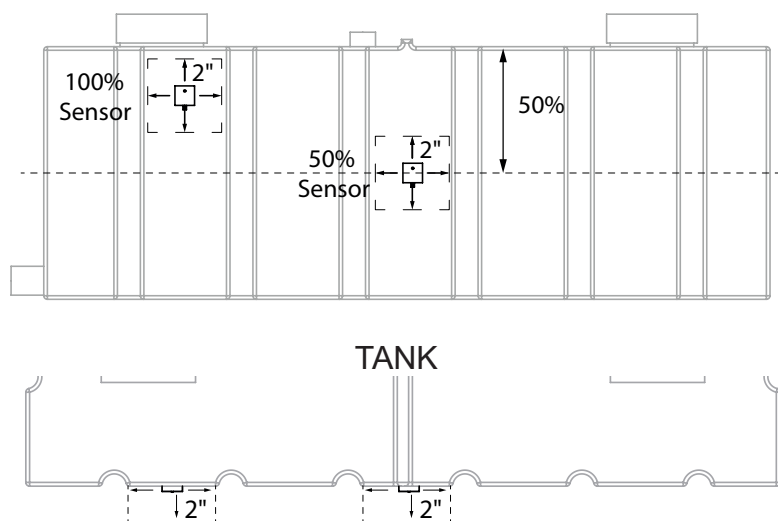

Clearance should be no less than 2"

10

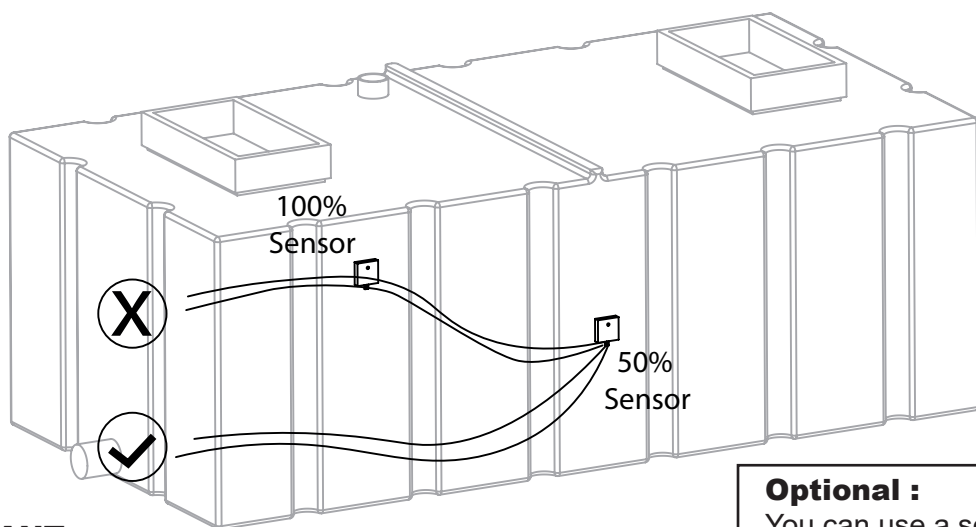

IMPORTANT :


There can not be any metallic part or another water tank within the clearance section of each sensor. This can affect its sensitivity creating and false reading.

Optional :

You can use a second set of sensor, please respect clearance between sensors.

There shouldn't be another cable, sensor or any wire above our sensors.

11

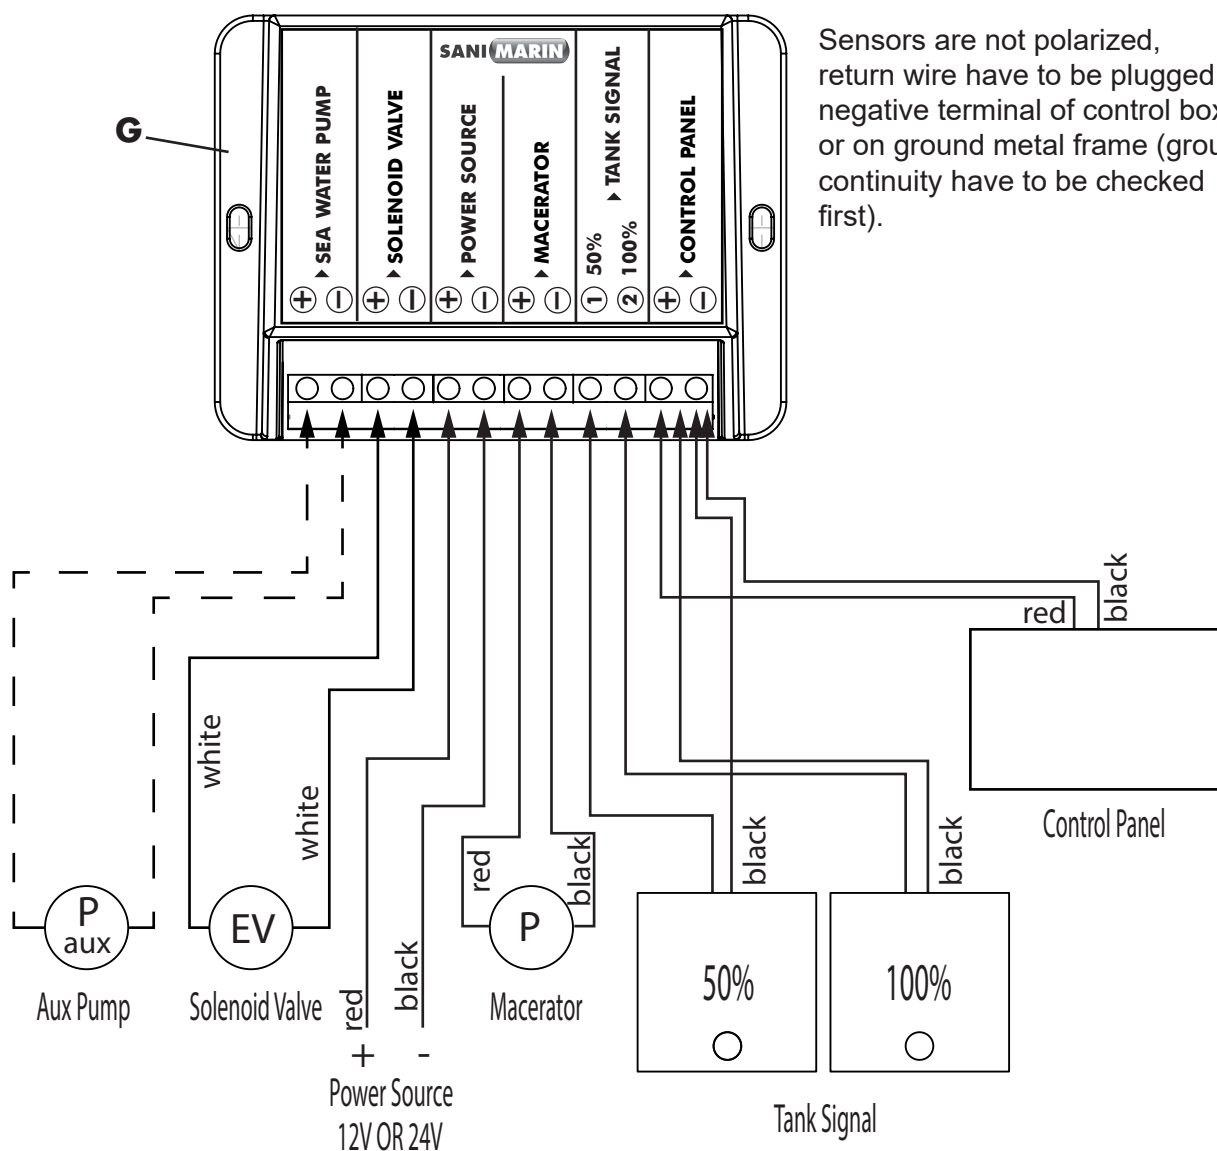

Sensors are not polarized, return wire have to be plugged on negative terminal of control box or on ground metal frame (ground continuity have to be checked first).

IMPORTANT : SENSOR SETUP


Have to be done with empty tank.

After installation of sensors and all wiring is completed, turn ON power.

Before normal use, it is **IMPORTANT** to setup the sensor system.*


Black tank must be empty.

Press "NORMAL" and "EMPTY" in the control panel for more than 5 seconds.

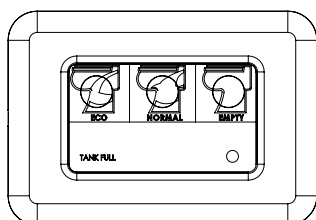



Tank Empty

Green = ON
Yellow = OFF
Red = OFF
Audible = OFF
Usage = Normal

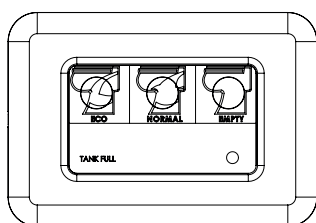


@ 50%


Green = ON
Yellow = ON
Red = OFF
Audible = OFF
Usage = Normal
Sensor 1 = ON

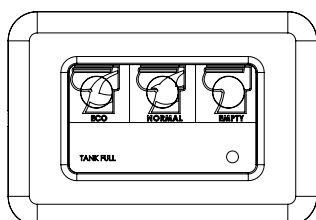

@ 100%

Green = OFF
Yellow = OFF
Red = ON (blinks)
Audible = 4 Beeps
Usage = Only 3 more cycles
Sensor 1 = ON
Sensor 2 = ON

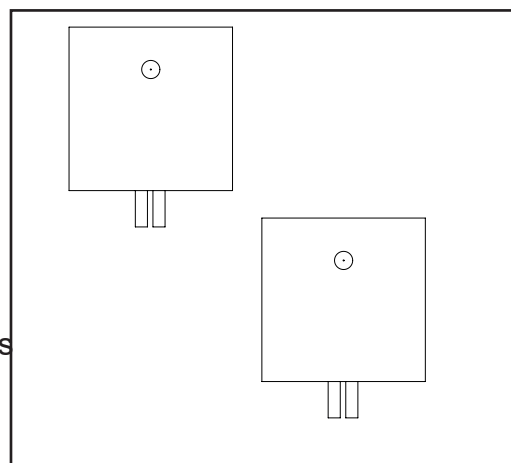

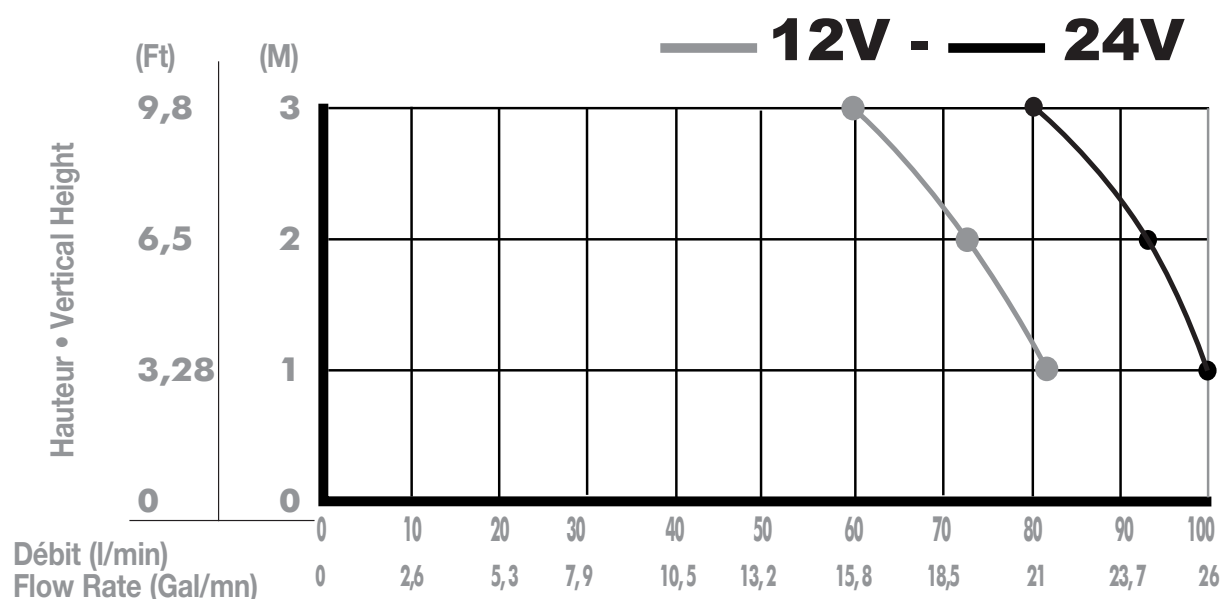

Max. vertical evacuation: 9.8 ft / 3 m
 Max. horizontal evacuation: 98 ft / 30 m

Nominal power :
 300 W in 12 V version
 360 W in 24 V version

Current consumption:
 12V (300W) 25A
 24V (360W) 15A



Electrical class III

Isolation level: IPX4

Cable sizes :
 12 V (300 W) 1,5 mm² = 1 M max / 2,5 mm² = 2 M max / 4 mm² = 3 M max / 6 mm² = 4,3 M max
 24 V (360 W) 1,5 mm² = 3,5 M max / 2,5 mm² = 6 M max / 4 mm² = 9,5 M max / 6 mm² = 14 M max

Net weight
 SN 4 : 29 Kg / 62 Lbs

SN4

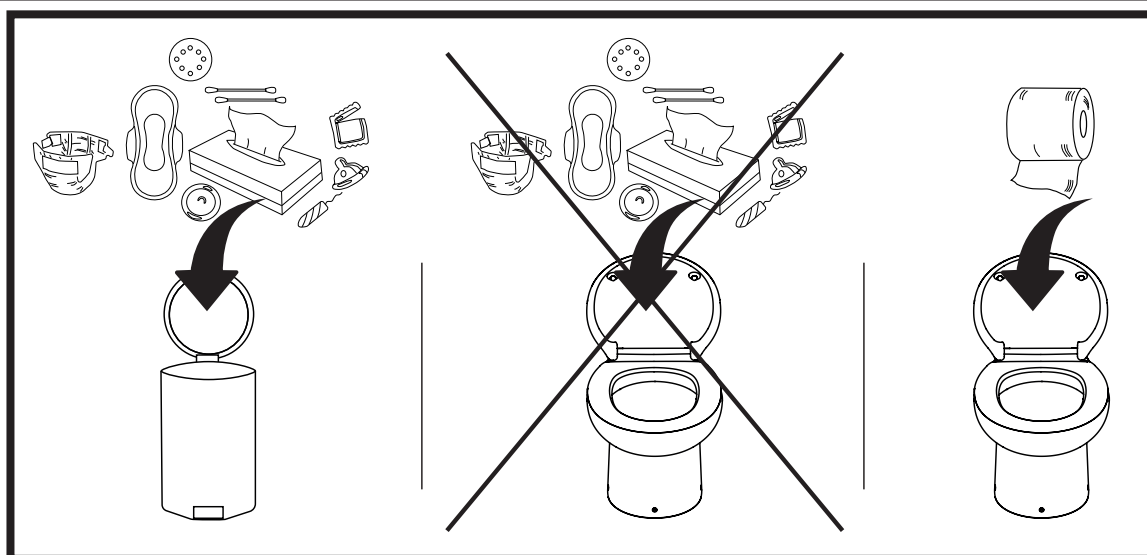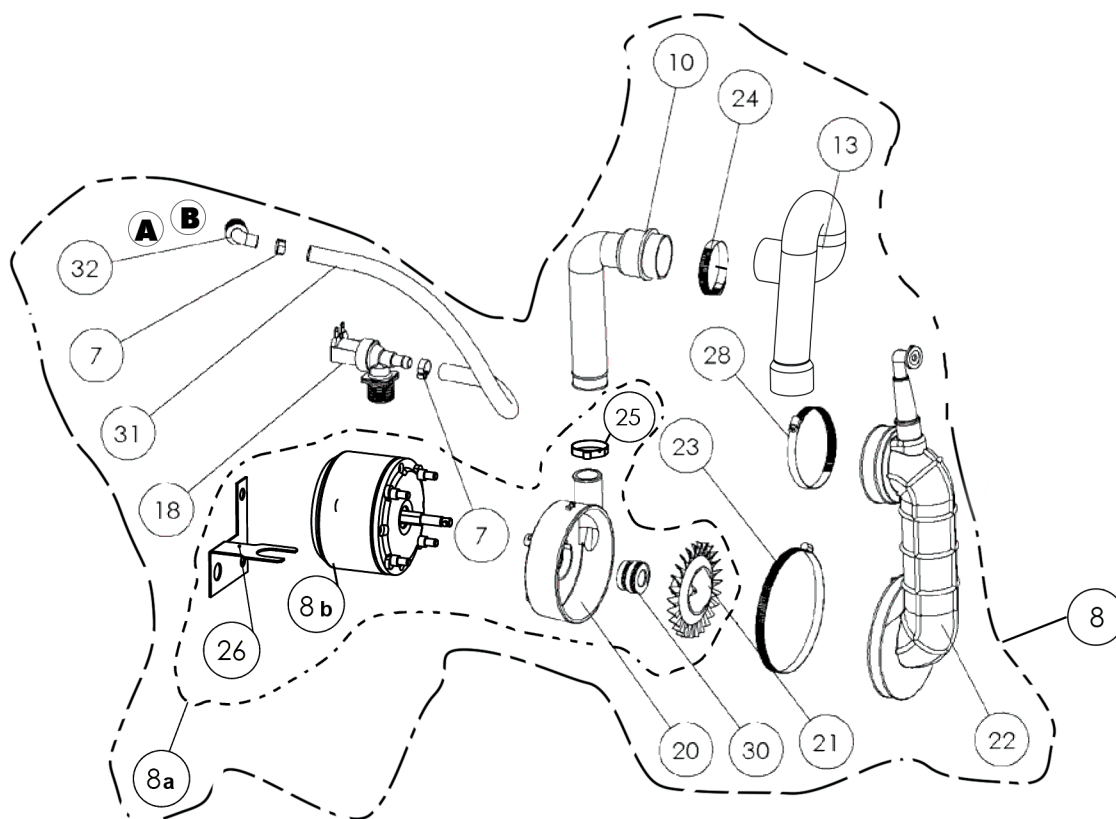

For service or for further inquiries, please call or contact one of the following addresses:

United States
SFA-SANIFLO INC.
 105 Newfield Avenue, Suite A
 Edison, NJ 08837

Canada
SFA-SANIFLO INC.
 500 Jamieson Parkway, Unit 5
 Cambridge, ON N3C 0G5

Toll Free: 1-800-571-8191
Telephone: 1-732-225-6070
Fax: 1-732-225-6072
E-mail: sfasales@saniflo.com
WebSite: www.saniflo.com

Toll Free: 1-800-363-5874
Telephone: 1-519-824-1134
Fax: 1-519-824-1143
E-mail: ventes@saniflo.ca
WebSite: www.saniflo.ca

SANIMARIN 4RV is a WC equipped with a pump/macerator which installed and used correctly will give reliable and consistent service for many years. SANIMARIN4RV is for mobile unit use.

THIS DEVICE MAY BE USED BY CHILDREN WHO ARE AT LEAST 8 YEARS OLD, BY PEOPLE WITH REDUCED PHYSICAL, SENSORY OR MENTAL CAPACITIES OR THOSE WITHOUT KNOWLEDGE OR EXPERIENCE, IF THEY ARE PROPERLY SUPERVISED AND IF THE INSTRUCTIONS RELATING TO USING THE DEVICE COMPLETELY SAFELY HAVE BEEN GIVEN TO THEM AND THE ASSOCIATED RISKS HAVE BEEN UNDERSTOOD. CHILDREN MUST NOT PLAY WITH THE DEVICE. CLEANING AND MAINTENANCE UNDERTAKEN BY THE USER MUST NOT BE CARRIED OUT BY UNSUPERVISED CHILDREN.

USAGE

SANIMARIN 4RV can be used like any normal toilet and does not require any particular maintenance.

Caution 1 Only the disposal of toilet papers, fecal matter, and waste water will be under guarantee. Any damage due to foreign bodies such as cotton, condoms, sanitary towels, wet wipes food, hair, or liquids such as oils, solvent products,... will not be under guarantee.

Caution 2 If away for a long period (holiday,...) or in the event of a long interruption of electricity, the water and electricity supplies to the SANIMARIN® should be switched off.

GUARANTEE

2 years guarantee from date of purchase, subject to correct installation and correct use: disposal of toilet papers and fecal matter only. Guarantee is limited to replacement or service of the defective spare parts, and any indemnity or claim for damages will not be included.

Freight and packing costs, travel expenses are not included in the guarantee. It does not cover any normal deterioration of the material over time, any external deterioration or accident, incorrect disposal of sanitary products. Any modification without prior notice will not be under guarantee. Fixing, modification, or replacement of parts without our agreement will not be guaranteed, and will invalidate it. Our liability is solely for the product itself.

Guarantee starts from date of purchase we may request a copy of the invoice to validate the purchase date.

SFA SANIFLO