

SANIMARIN 41


STANDARD HEIGHT

NEW



MADE IN FRANCE

Its traditional design ensures the most comfortable seating.



Standard height, installed at floor level



Comfortable



Removable soft close seat



CONTROL SYSTEMS

(see detail page 20)

Comfort




Premium



Luxe



DIMENSIONS (mm)

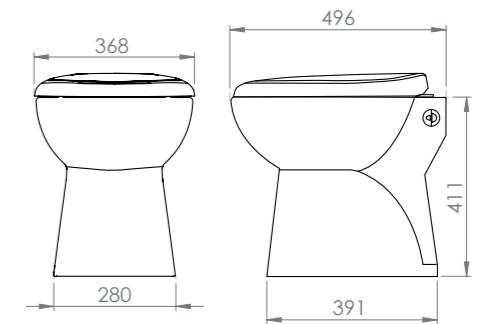

26Kg

TECHNICAL FEATURES

Discharge parameters	Vertical: 3 m / Horizontal: 30 m
Non return valve	Integrated
Outlet diameter	38 mm or 25 mm
Motor power	300 W (12 V), 360 W (24 V)
Electricity consumption	Dependent upon the control system (see detail p.5)
Water consumption	Dependent upon the control system from 1.2 L to 2.4 L
Water use	<ul style="list-style-type: none"> - Onboard freshwater (integrated solenoid valve) or outside pressurised water - Minimum dynamic pressure: 1.7 bar - Recommended pump flow rate 11 L / min

REFERENCES

Designation	Code	EAN
Sanimarin 41 Comfort 12 V	SN4112VLC	3308815095745
Sanimarin 41 Comfort 24 V	SN4124VLC	3308815095776
Sanimarin 41 Premium 12 V	SN4112VPREMIUM	3308815095752
Sanimarin 41 Premium 24 V	SN4124VPREMIUM	3308815095783
Sanimarin 41 Luxe 12 V	SN4112VCLAVSFA	3308815095769
Sanimarin 41 Luxe 24 V	SN4124VCLAVSFA	3308815095790