

SANIMARIN BEST

STANDARD HEIGHT

NEW



CONTROL SYSTEMS

(see detail page 20)

Comfort



Premium




Luxe



DIMENSIONS

(mm)

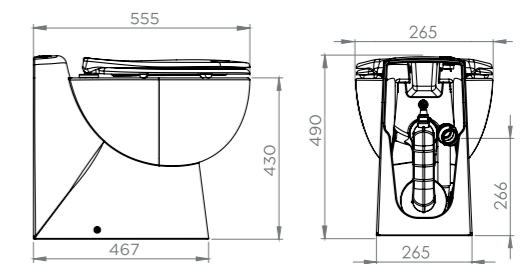

30Kg



MADE IN FRANCE

Perfect blend of modernity and comfort, it is the most luxurious in the range.



Acoustic pressure: 46 dB(A)



Contemporary design



Comfortable



Removable soft close seat

TECHNICAL FEATURES

Discharge parameters	Vertical: 3 m / Horizontal: 30 m
Non return valve	Integrated
Outlet diameter	38 mm or 25 mm
Motor power	300 W (12 V), 360 W (24 V)
Electricity consumption	Dependent upon the control system (see detail p.5)
Water consumption	Dependent upon the control system from 1.2 L to 2.4 L
Water use	<ul style="list-style-type: none"> - Onboard freshwater (integrated solenoid valve) or outside pressurised water - Minimum dynamic pressure: 1.7 bar - Recommended pump flow rate 11 L / min



REFERENCES

Designation	Code	EAN
Sanimarin Best Comfort 12 V	SNBEST12VLC	3308815095806
Sanimarin Best Comfort 24 V	SNBEST24VLC	3308815095837
Sanimarin Best Premium 12 V	SNBEST12VPREMIUM	3308815095813
Sanimarin Best Premium 24 V	SNBEST24VPREMIUM	3308815095844
Sanimarin Best Luxe 12 V	SNBEST12VCLAVSFA	3308815095820
Sanimarin Best Luxe 24 V	SNBEST24VCLAVSFA	3308815095851