

110 V - 220 V RANGE

ROBUST AND COMFORTABLE WCS

A comprehensive range of marine wcs to meet every requirement

CONTROL SYSTEM



Electric button **Dual Flush** on the WC unit.


- Two automatic cycles:
Normal: 5 L. / Eco: 3.6 L.
- Press both buttons simultaneously to place the WC in "dry bowl" mode.

DIMENSIONS

(mm)



Sanimarin 43

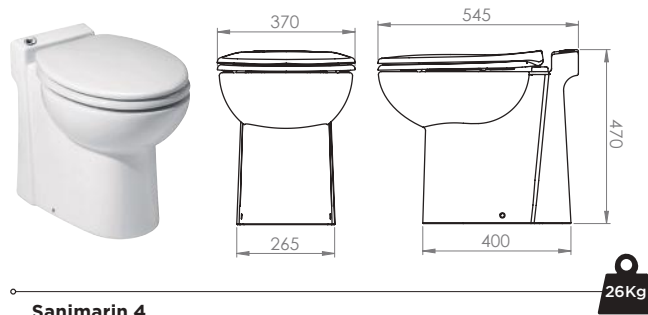

Sanimarin 4

TECHNICAL FEATURES

Pumping height	3 m
Horizontal pumping distance	30 m
Non return valve	Integrated
Outlet diameter	32 mm
Supply voltage	110 V, 220 V
Motor power	550 W (220 V), 800 W (110 V)
Water consumption	Eco : 3,6 L / Normal : 5 L
Water use	- Onboard freshwater (integrated solenoid valve) - Minimum dynamic pressure : 1.7 bar

REFERENCES

DESIGNATION	CODE	EAN
Sanimarin 4 Dual Flush 110 V	SN4110VDF	3308815076553
Sanimarin 4 Dual Flush 220 V	SN4220VDF	3308815076560
Sanimarin 43 Dual Flush 110 V	SN43110VDF	3308815076591
Sanimarin 43 Dual Flush 220 V	SN43220VDF	3308815076607