

SANIMARIN 31
REDUCED HEIGHT




MADE IN FRANCE

Thanks to its compact footprint
this model fits easily into confined spaces.



Acoustic
pressure:
52 dB(A)



Mounting
on a raised step



Small
dimensions



Removable soft close
seat






CONTROL SYSTEMS
(refer to page 20 for details)

Comfort 

Premium 

Luxe 

DIMENSIONS
(mm)

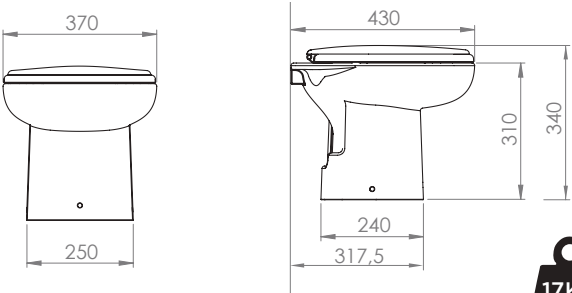

17Kg

TECHNICAL FEATURES	
Discharge parameters	Vertical : 3 m / Horizontal : 30 m
Non return valve	Integrated
Outlet diameter	38 mm or 25 mm
Motor power	300 W (12 V), 360 W (24 V)
Electricity consumption	Dependent upon the control system (details on page 5)
Water consumption	Dependent upon the control system from 1.2 L to 2.4 L
Water use	- Onboard freshwater (integrated solenoid valve) or outside pressurised water - Minimum dynamic pressure: 1.7 bar - Recommended pump flow rate 11 L / min

REFERENCES		
VOLTAGE SELECTION		
SANIMARIN 31 12V	SN31-12V	3308815099545
SANIMARIN 31 24V	SN31-24V	3308815099552
⊕ CONTROL SYSTEM SELECTION		
MARINE COMFORT SWITCH	SN-SWITCH1	3308815099644
MARINE PREMIUM DUAL BUTTON	SN-SWITCH2	3308815099651
MARINE LUXE CONTROL PANELWHITE	SN-SWITCH3	3308815099668
MARINE LUXE CONTROL PANELBLACK	SN-SWITCH4	3308815099675
MARINE LUXE CONTROL PANEL	SN-SWITCH5	3308815099682