

# SANIMARIN 32

## REDUCED HEIGHT



Easy to install against a vertical partition.



Acoustic pressure: 52 dB(A)



Mounting on a raised step




Vertical back line



Removable soft close seat



### DIMENSIONS (mm)

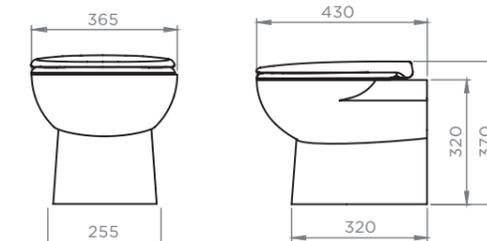

### CONTROL SYSTEMS

(refer to page 22 for details)

#### EVOLUTION

Comfort



Premium



#### NEW

Luxe



### TECHNICAL FEATURES

<b>Discharge parameters</b>	Vertical : 3 m / Horizontal : 30 m
<b>Non return valve</b>	Integrated
<b>Outlet diameter</b>	38 mm or 25 mm
<b>Motor power</b>	300 W (12 V), 360 W (24 V)
<b>Electricity consumption</b>	Dependent upon the control system (details on page 5)
<b>Water consumption</b>	Adjustable from 1.6 to 3.4 L depending on requirements
<b>Water use</b>	<ul style="list-style-type: none"> <li>- Onboard freshwater (integrated solenoid valve) or outside pressurised water</li> <li>- Minimum dynamic pressure: 1.7 bar</li> <li>- Recommended pump flow rate 11 L / min</li> </ul>

### REFERENCES

#### VOLTAGE SELECTION

SANIMARIN 32 <b>12 V</b>	SN32-12V	3308815099569
SANIMARIN 32 <b>24 V</b>	SN32-24V	3308815099576

#### ⊕ CONTROL SYSTEM SELECTION

MARINE COMFORT SWITCH	SN-SWITCH1	3308815099644
MARINE PREMIUM DUAL BUTTON	SN-SWITCH2	3308815099651
MARINE LUXE CONTROL PANELWHITE	SN-SWITCH3	3308815099668
MARINE LUXE CONTROL PANELBLACK	SN-SWITCH4	3308815099675
MARINE LUXE CONTROL PANEL	SN-SWITCH5	3308815099682