

SANIMARIN 4

STANDARD HEIGHT

NEW



MADE IN FRANCE

A classic, ergonomic design with a spacious seat for optimal comfort.



Acoustic pressure: 46 dB(A)



Standard height, installed at floor level



Comfortable



Removable soft close seat

CONTROL SYSTEMS

(refer to page 22 for details)

EVOLUTION
Comfort




Premium



NEW
Luxe



DIMENSIONS (mm)

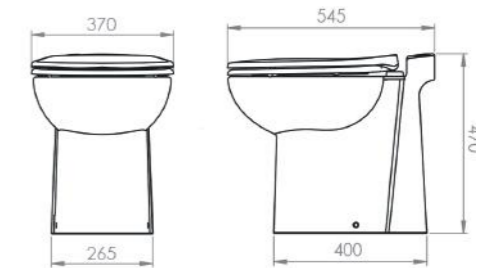

29Kg

TECHNICAL FEATURES

Discharge parameters	Vertical : 3 m / Horizontal : 30 m
Non return valve	Integrated
Outlet diameter	38 mm or 25 mm
Motor power	300 W (12 V), 360 W (24 V)
Electricity consumption	Dependent upon the control system (details on page 5)
Water consumption	Adjustable from 1.6 to 3.4 L depending on requirements
Water use	<ul style="list-style-type: none"> - Onboard freshwater (integrated solenoid valve) or outside pressurised water - Minimum dynamic pressure: 1.7 bar - Recommended pump flow rate 11 L / min



REFERENCES

VOLTAGE SELECTION

SANIMARIN 4 12 V	SN4-12V	3308815103167
SANIMARIN 4 24 V	SN4-24V	3308815103174

⊕ CONTROL SYSTEM SELECTION

MARINE COMFORT SWITCH	SN-SWITCH1	3308815099644
MARINE PREMIUM DUAL BUTTON	SN-SWITCH2	3308815099651
MARINE LUXE CONTROL PANELWHITE	SN-SWITCH3	3308815099668
MARINE LUXE CONTROL PANELBLACK	SN-SWITCH4	3308815099675
MARINE LUXE CONTROL PANEL	SN-SWITCH5	3308815099682