

SANIMARIN 41

STANDARD HEIGHT



Its classic shape offers comfort in a compact design.



Acoustic pressure: 46 dB(A)

NEW / Optional



Comfortable



Removable soft close seat



SANISEAT+

Heated toilet seat with bidet

- Soft-close seat and cover
- Remote control
- Temperature control (clear water, drying and seat)
- Self-cleaning spray head and jets
- Power supply voltage: 220V



CONTROL SYSTEMS

(refer to page 22 for details)

EVOLUTION

Comfort



Premium




NEW

Luxe



DIMENSIONS

(mm)

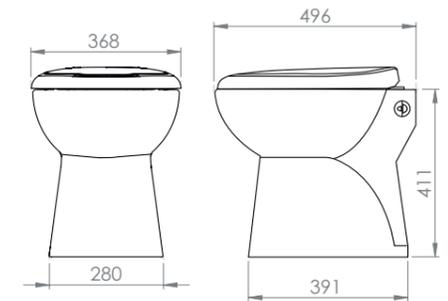

TECHNICAL FEATURES

Discharge parameters	Vertical : 3 m / Horizontal : 30 m
Non return valve	Integrated
Outlet diameter	38 mm or 25 mm
Motor power	300 W (12 V), 360 W (24 V)
Electricity consumption	Dependent upon the control system (details on page 5)
Water consumption	Adjustable from 1.6 to 3.4 L depending on requirements
Water use	<ul style="list-style-type: none"> - Onboard freshwater (integrated solenoid valve) or outside pressurised water - Minimum dynamic pressure: 1.7 bar - Recommended pump flow rate 11 L / min

REFERENCES

VOLTAGE SELECTION

SANIMARIN 41 12 V	SN41-12V	3308815099583
SANIMARIN 41 24 V	SN41-24V	3308815099590

⊕ CONTROL SYSTEM SELECTION

MARINE COMFORT SWITCH	SN-SWITCH1	3308815099644
MARINE PREMIUM DUAL BUTTON	SN-SWITCH2	3308815099651
MARINE LUXE CONTROL PANELWHITE	SN-SWITCH3	3308815099668
MARINE LUXE CONTROL PANELBLACK	SN-SWITCH4	3308815099675
MARINE LUXE CONTROL PANEL	SN-SWITCH5	3308815099682